


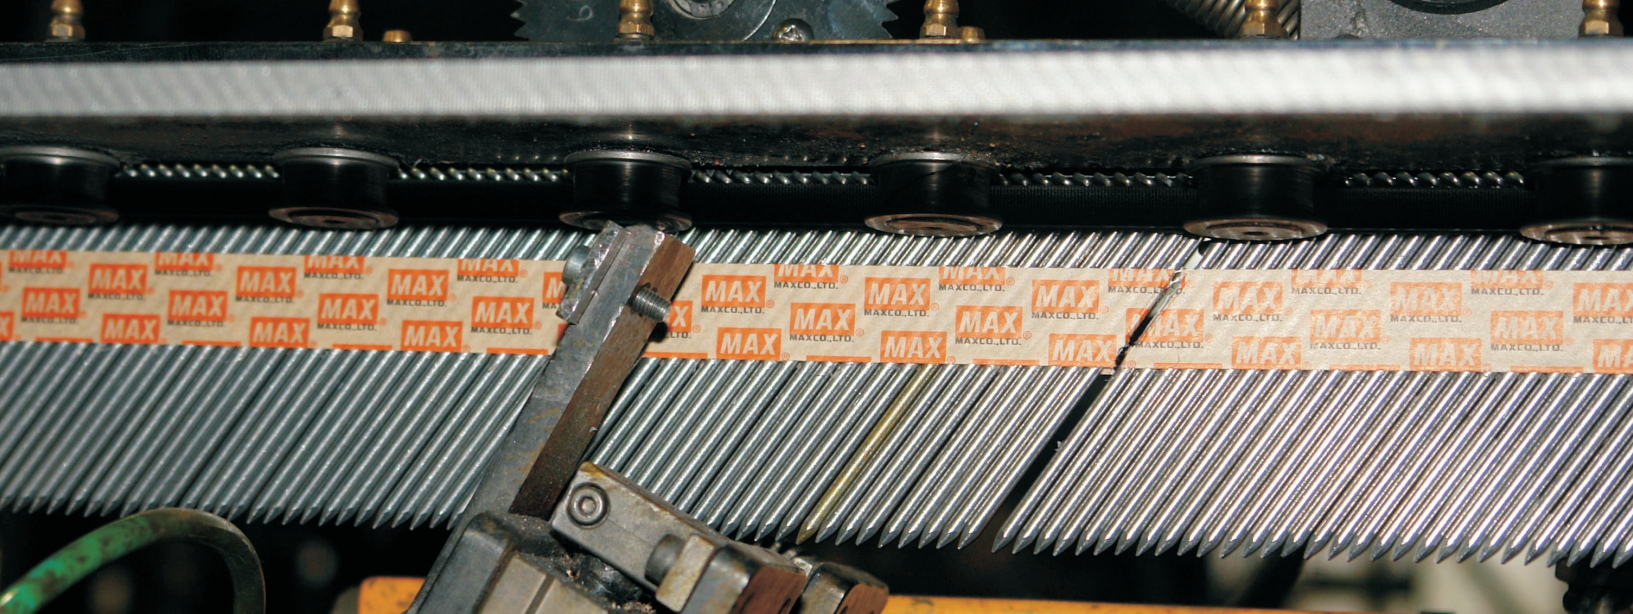

Paper strip 34-degree collated nails

loose nails

wire coil nails

Hi-Load & Jumbo 15°


plastic sheet coil nails

plastic strip nails

paper strip nails

TOOL

BeA D100-934
BOSTITCH GF9033-E
MAX SN883-100CH 34°
MAX SN890CH2 34°
SENCO FRAMEPRO 651

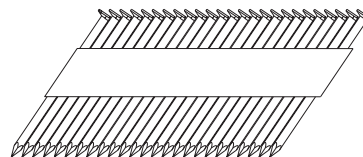

Nails can be electro-galvanized.
Layer from 8 to 13µm in yellow or grey passivation.
Grey passivation from 8 to 13µm Cr-3.
Hot dip galvanized min 55µm.
Non galvanized nails are covered with a layer of yellow varnish.
Nails can be produced from stainless steel in quality V2A (AISI 304) or V4A (AISI 316).

Shank diameter	Nail length	Head diameter
2,5 - 3,4 mm .099" ~ .133"	50 - 100 mm 2" ~ 4"	6,5 - 7,7mm .256" ~ .303"
Shank type		
Smooth shank	D-HEAD	
Screw shank		
Ring shank	OFFSET	
		