


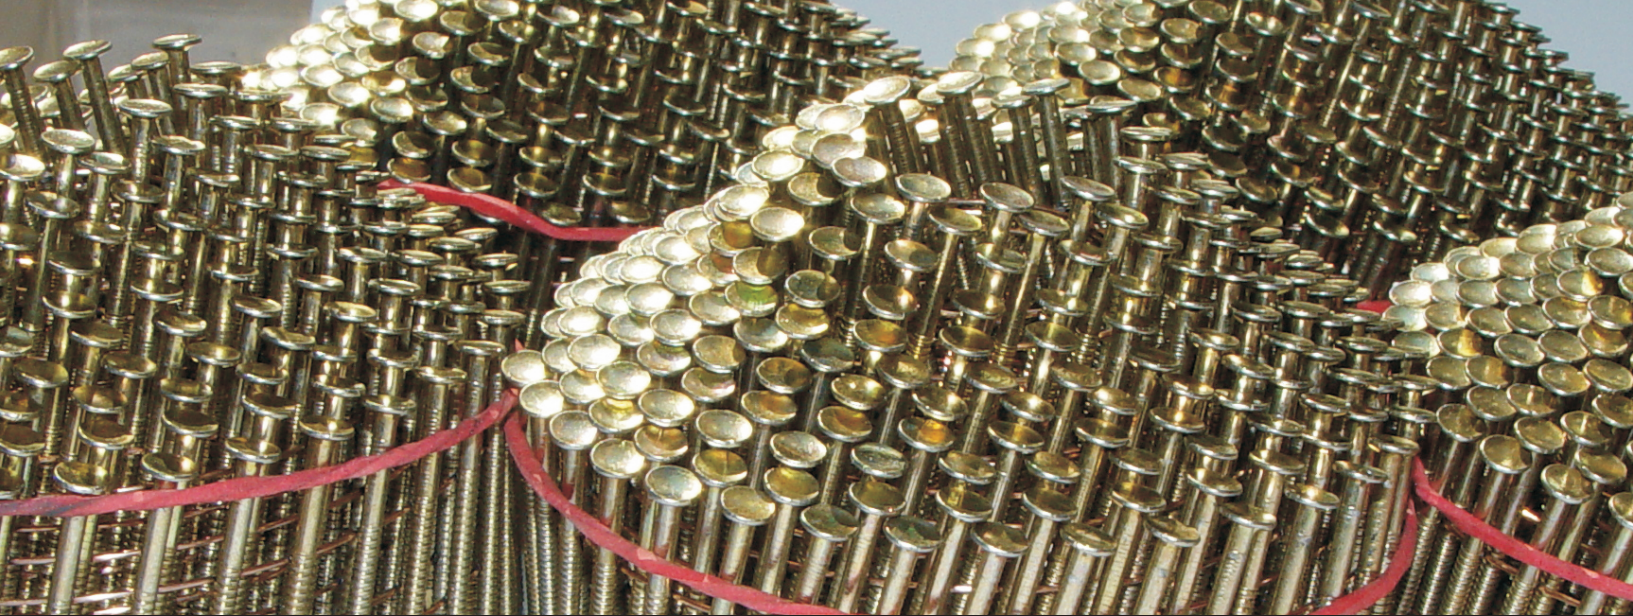


conical 15°

Wire coil nails

TOOL

BeA 559 DC
BOSTITCH IC50-1-E
MAX HN50

MAX CN452S
MAX CN552S
SENCO SCN45



loose nails

wire coil nails

flat 15°

flat 15° EPAL

conical 15°

Nails can be electro-galvanized.

Layer from 8 to 13µm in yellow or grey passivation.

Grey passivation from 8 to 13µm Cr-3.

Hot dip galvanized min 55µm.

Non galvanized nails are covered with a layer of yellow varnish.

Nails can be produced from stainless steel in quality V2A (AISI 304) or V4A (AISI 316).

Hi-Load & Jumbo 15°

plastic sheet coil nails

plastic strip nails

paper strip nails

Shank diameter

1,8 ~ 2,1 mm
.071" ~ .083"

Nail length

25 ~ 50 mm
1" ~ 2"

Shank type

Smooth shank
Screw shank
Ring shank

Head diameter

3,5 ~ 5,0 mm
.147" ~ .179"

Heads

LENSKOPF



TB



POZI 1



POZI 2



Points

DIAMOND



CLINCH



CHISEL



BP



NO POINT

