


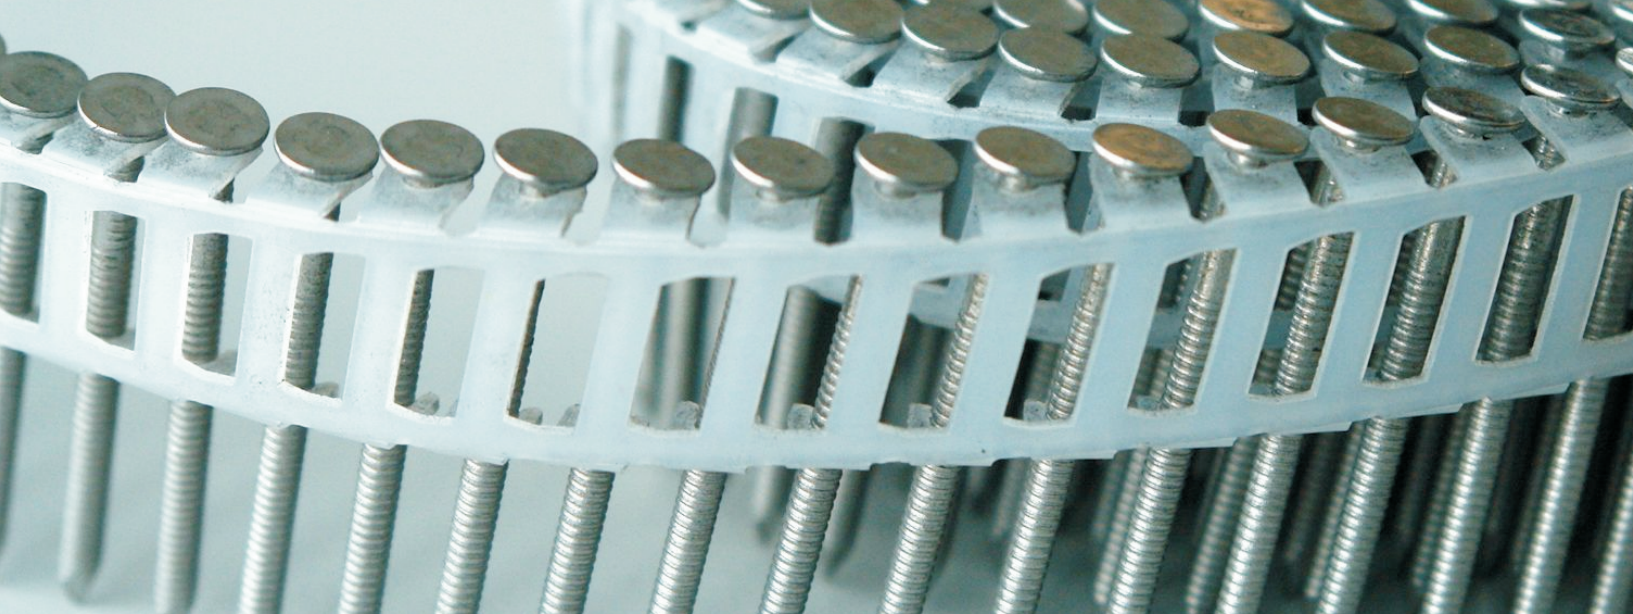

15° for plastic sheet medium

Plastic coil nails

loose nails

wire coil nails

Hi-Load & Jumbo 15°

plastic sheet coil nails

15° for plastic sheet mini

15° for plastic sheet medium

ankernagel nails 15°


plastic strip nails

paper strip nails

TOOL

BeA SN 40
BOSTICH N63
MAX CN 552S
MAX CN 565S

MAX CN 890S
SENCO SCN 45
SENCO SCN 56



Nails can be electro-galvanized.
Layer from 8 to 13µm in yellow or grey passivation.
Grey passivation from 8 to 13µm Cr-3.
Hot dip galvanized min 55µm.
Non galvanized nails are covered with a layer of yellow varnish.
Nails can be produced from stainless steel in quality V2A (AISI 304) or V4A (AISI 316).

	Shank diameter	Heads	Points
	1,8 ~ 3,1 mm .071" ~ .122"	LENSKOPF 	DIAMOND 
	Nail length 25 ~ 90 mm 1" ~ 3 1/2"	TB 	CLINCH 
	Shank type Smooth shank Screw shank Ring shank	POZI 1 	CHISEL 
			BP 
	Head diameter 4,2 ~ 7,7 mm .165" ~ .203"	POZI 2 	NO POINT 
			