


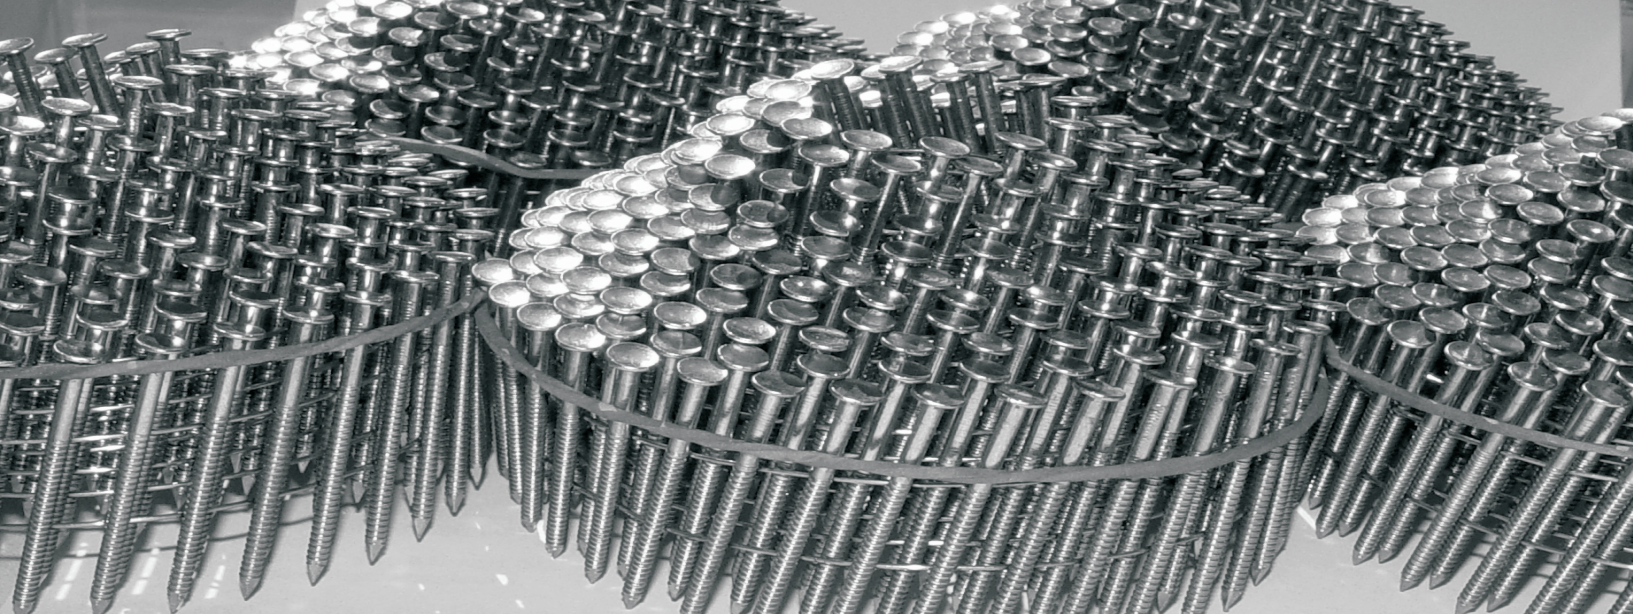


conical 15°

## Wire coil nails

### TOOL

BeA 559 DC  
BOSTITCH IC50-1-E  
MAX HN50

MAX CN452S  
MAX CN552S  
SENCO SCN45



loose nails

wire coil nails

- flat 15°
- flat 15° EPAL
- conical 15°

Hi-Load & Jumbo 15°

plastic sheet coil nails

plastic strip nails

paper strip nails

Nails can be electro-galvanized.  
Layer from 8 to 13µm in grey passivation.  
Grey passivation from 8 to 13µm Cr+3.  
Hot dip galvanized min 55µm.  
Non galvanized nails are covered with a layer of yellow varnish.  
Nails can be produced from stainless steel in quality V2A (AISI 304) or V4A (AISI 316).

|  | Shank diameter                                          | Heads                                                                                            | Points                                                                                            |
|--|---------------------------------------------------------|--------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|
|  | 1,8 ~ 2,1 mm<br>.071" ~ .083"                           | LENSKOPF<br> | DIAMOND<br>  |
|  | Nail length<br>25 ~ 50 mm<br>1" ~ 2"                    | TB<br>       | CLINCH<br>   |
|  | Shank type<br>Smooth shank<br>Screw shank<br>Ring shank | POZI 1<br>   | CHISEL<br>   |
|  | Head diameter<br>3,5 ~ 5,0 mm<br>.138" ~ .197"          |             | BP<br>       |
|  |                                                         | POZI 2<br>   | NO POINT<br> |
|  |                                                         |             |                                                                                                   |