Hot Dipped Galvanized

- loose nails
- wire coil nails
- Hi-Load & Jumbo 15°
- plastic sheet coil nails
- plastic strip nails
- paper strip nails
- **hot dipped galvanized**
- herco performence grip

TOOL

Flat, Hi-Load & Jumbo Coils Specification to be agreed with customer requirements.

Galvanization adds a layer of zinc to the exterior of steel to enhance its corrosion resistance.

After pretreatment the nails are lowered into a ceramic-lined furnace with molten zinc at a temperature of 560°C (1040°F) which means that our technology is called "high temperature hot-dip galvanizing (HT-HDG)".

Our nails have an equal layer of zinc: minimum 55µm.
On request we can make thicker layer of zinc coating.

Our HDG coatings are lead free.

As a general rule, the thicker the zinc coating, the longer the corrosion protection afforded.

Hot-dip galvanized fasteners will last longer than either mechanically galvanized or electroplated products.

Shank diameter

2,1 ~ 4,6 mm
.083" ~ .181"

Nail length

25 ~ 160 mm
1" ~ 6.3"

Shank type

Smooth shank
Screw shank
Ring shank
SQTW
Grooved
HPG

Head diameter

5 ~ 8,5 mm
.196" ~ .335"

Heads

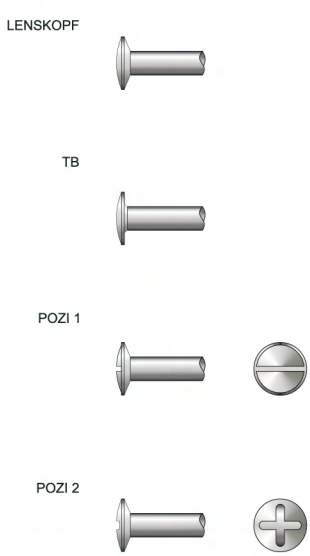

Points

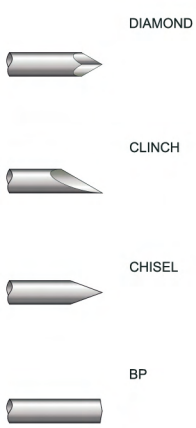

HERCO®
www.herco.com.pl