


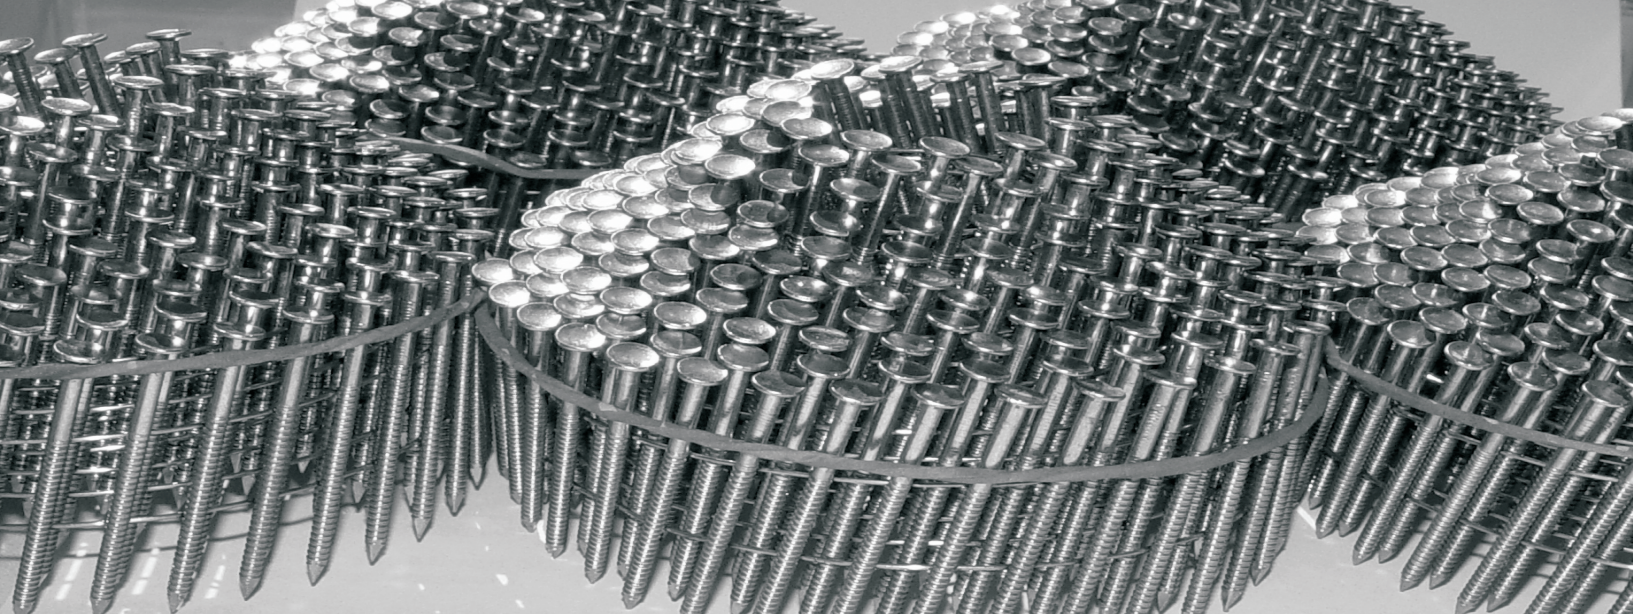


conical 15°

Wire coil nails

TOOL

BeA 559 DC
BOSTITCH IC50-1-E
MAX HN50

MAX CN452S
MAX CN552S
SENCO SCN45



loose nails

wire coil nails

- flat 15°
- flat 15° EPAL
- conical 15°

Hi-Load & Jumbo 15°

plastic sheet coil nails

plastic strip nails

paper strip nails

Nails can be electro-galvanized.
Layer from 8 to 13µm in grey passivation.
Grey passivation from 8 to 13µm Cr+3.
Hot dip galvanized min 55µm.
Non galvanized nails are covered with a layer of yellow varnish.
Nails can be produced from stainless steel in quality V2A (AISI 304) or V4A (AISI 316).

Shank diameter	Heads		Points	
1,8 ~ 2,1 mm .071" ~ .083"	LENSKOPF			DIAMOND
	TB			CHISEL
	POZI 1			BP
	POZI 2			NO POINT
Nail length				
25 ~ 50 mm 1" ~ 2"				
Shank type				
Smooth shank Screw shank Ring shank				
Head diameter				
3,5 ~ 5,0 mm .138" ~ .197"				